


## CR64 Low Pressure Oil Hose 3/16"

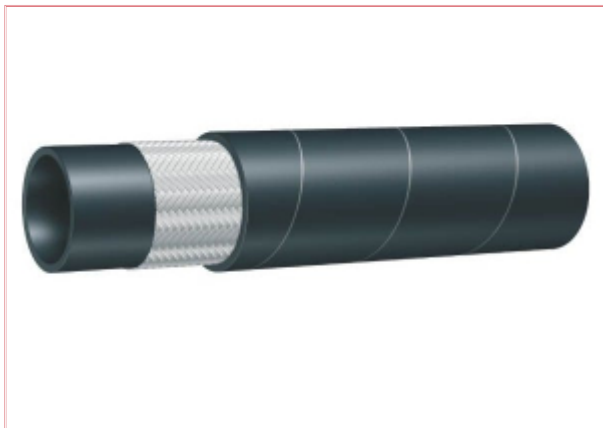

**Part No:** CR64

**Price:** £4.22 (exc VAT) | £5.06 (inc VAT)

### Specifications

CR64 Low Pressure Oil Hose 3/16"

Low pressure Oil resistant Hose

**\*\*Not suitable for use as a Hydraulic hose\*\***

Specifications - Rubber hydraulic hose with 1 ply of high-strength fabric mesh

Benefits - Lightweight

- Flexible hose

Application - Low pressure oil systems

- Mineral oil-based and glycol-based fluids

- Lubricants

- Air

- Water

Properties - Oil-resistant, smooth outer coating

Technical information - Available lengths: by the metre

- Not suitable for dynamic pressure loads

Test pressure 70 BAR

Ferrule type SFA-14S

Construction Hose material outside

SBR/CR-rubber

Hose material inside NBR-rubber

Reinforcement

- braid synthetic braid

- quantity: 2

Hose material inside NBR

Internal Ø (inch) 3/16" in

Internal Ø (mm) 4.8 mm

Working pressure 35 BAR

Length per roll 50 m

Outside Ø (mm) 11.1 mm

DN according to DIN 5

Burst pressure (bar) 138 BAR

Dn according to EN 5

Bend radius 50 mm

Working pressure 3.5 MPa

Number of plies 1 pcs

Material SBR / CR