


## 888804KR Primer Red Oxide 400ml Aerosol

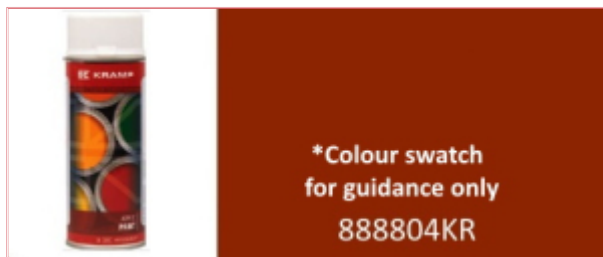

**Part No:** 888804KR

**Price:** £12.79 (exc VAT) | £15.35 (inc VAT)

### Specifications

888804KR Primer Red Oxide 400ml Aerosol

Part number 888804KR

\*\*Only use Kramp brand UN1263 thinners, primers and hardeners in conjunction with Kramp brand UN1263 paints.\*\*

Specifications - Can also be applied as a thick layer

- Quick drying
- Active corrosion protection (zinc phosphate)

Benefits - High coverage

- Saves time
- Ensures a long service life

Application - Suitable for iron and steel

Properties - Can be coated with 1K and 2K varnishes

- Base coat: Kramp primer (coat thickness: 50-60 µm)
- Can be stored outside for up to 5 days without a final coating layer
- High filling capability

- For electrostatic processing
- Temperature resistance: continuous load 120°C, transient load 150°C
- Dry matter content: 65-70%
- Basic viscosity (DIN 53 211): thixotropic
- Specific weight (DIN 51 757): 1.4-1.5 kg/l
- Gloss (DIN 67 530): 10-20%/60° (matt)
- Chromate-free and lead-free
- Adhesion (DIN 53 151): iron, steel: class 0 (very good)

Technical information - Processing conditions: from +10°C and up to 80% relative humidity

- Surface preparation: The object to be treated must be thoroughly cleaned, degreased and sanded as necessary
- Dust-dry after 15-20 minutes (at 20°C)
- Set to touch after 45-60 minutes (at 20°C)
- Set to touch after 4-5 hours (at 20°C)
- Final hardness after 3-4 days (at 20°C)
- Using Kramp rapid drying hardener can reduce drying times
- Lower temperatures result in longer drying times

Unit Each

Colour Red

Type Acryl

Capacity (l.) (l) 400ml

Theoretical coverage 3,8 - 4,2